

## STU-HL40033G

405nm /1000mW Violet Laser Diode

### Features

- Optical output power: 1,000mW (CW)
- Violet Lasing: 405nm Typ.
- Low operating current: 1,000mA Typ.
- Low operating voltage: 5.0V Max.
- Package: 9.0mm
- Multiple transverse mode
- TE mode oscillation



### Applications

- Direct imaging for PCB
- Industry
- Display
- Bio & Medical

### Absolute Maximum Ratings(Tc=25°C)

Item	Symbol	Ratings	Unit
Optical output power	Po	1,100	mW
LD Reverse Voltage	VR(LD)	2	V
Operating Temperature	Topr	0 ~ +30	°C
Storage Temperature	Tstg	-40 ~ +85	°C







\* Monitor PD for initial checking purpose only

### Optical and Electrical Characteristics(Tc=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Threshold current	Ith	250	320	400	mA	-
Operating current	Iop	-	1,000	1,300	mA	Po=1,000mW
Operating voltage	Vop	-	-	5.0	V	Po=1,000mW
Beam divergence Parallel to the junction	$\theta_{//}$	5	13	25	°	Po=1,000mW, Full angle $1/e^2$
Beam divergence Perpendicular to the junction	$\theta_{\perp}$	30	42	50	°	Po=1,000mW, Full angle $1/e^2$
Lasing Wavelength	$\lambda_p$	400	405	410	nm	Po=1,000mW

\* Monitor PD for initial checking purpose only

### Typical Characteristic Curves

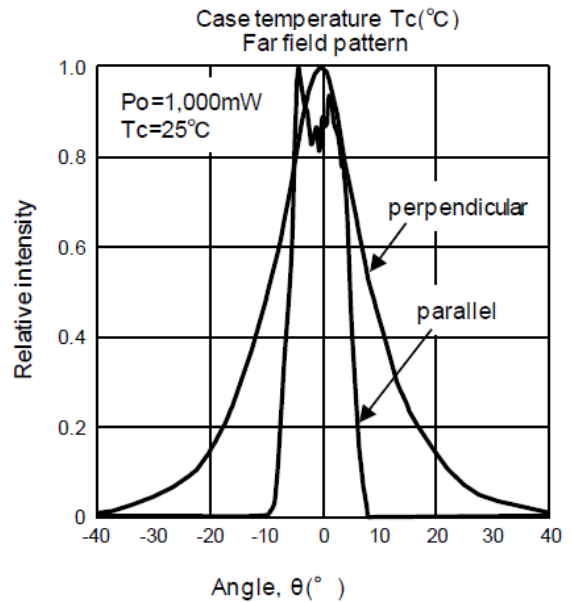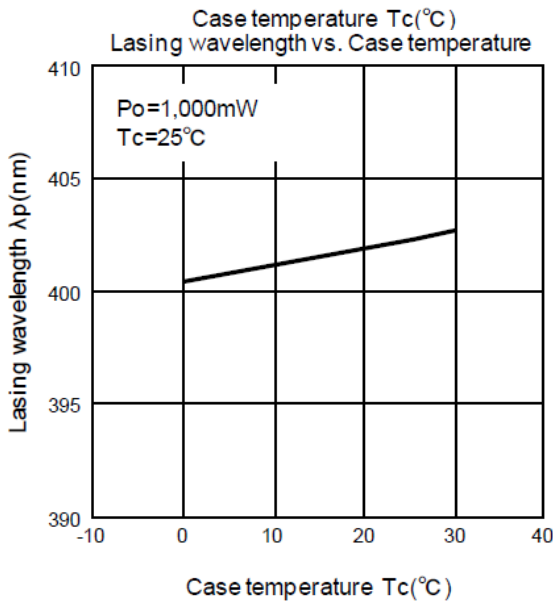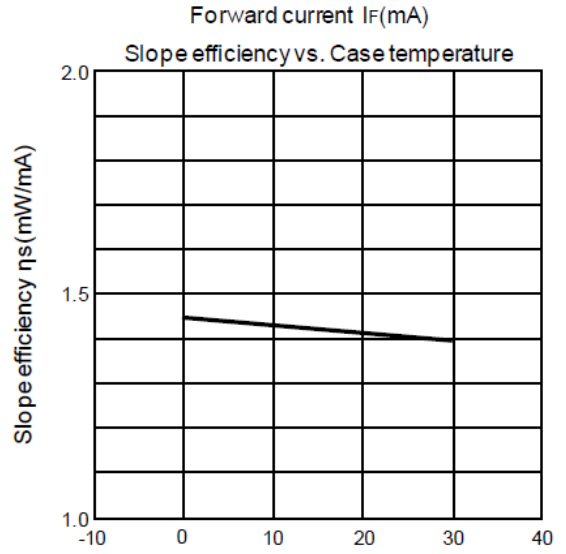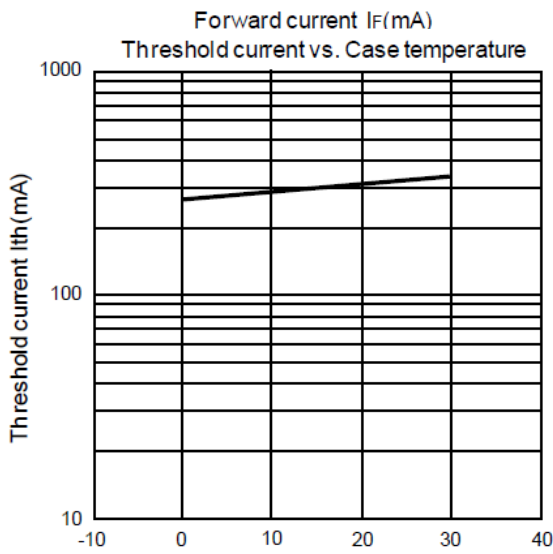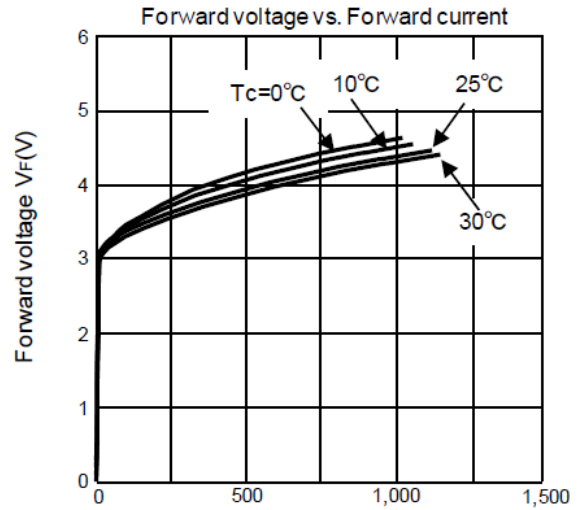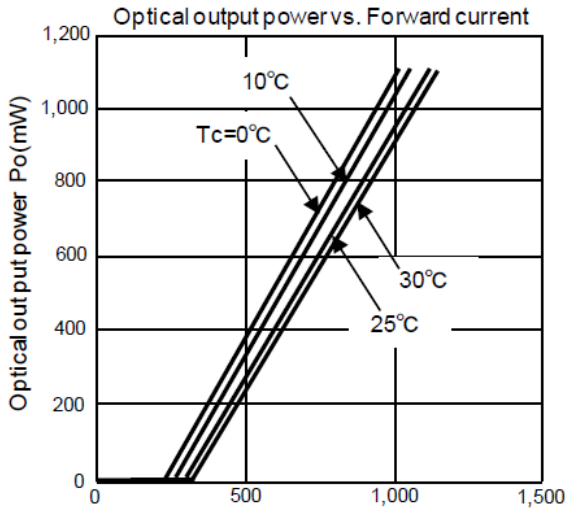

Outline & Internal Circuit

