

STD-UMC-230-915-TE-25-5.0

High Power Single Emitter Diode Lasers, 915nm, 25W CW


Features:

- High output power
- High electrical-optical conversion efficiency
- High brightness
- High reliability

Technical Advantages:


- High efficient epitaxial structure design
- High-quality epitaxial material growth
- High brightness structure design
- Special passivation method for cavity surface

Specifications

	Symbol	Min.	Typical	Max.	Unit
Operation					
Optical output power	P _o		25		W
Wavelength	λ _o	905	915	925	nm
Operation mode			CW		
Dimensions					
Emission region width	E.W.	225	230	235	um
Cavity length	L	4995	5000	5005	um
Width	W	395	400	405	um
Thickness	D	140	145	150	um
Electro-optical parameters					
Electro-optical efficiency	η	58	60		%
Slope efficiency	SE	1.05	1.1		W/A
Threshold efficiency	I _{th}		1.5	1.6	A
Operation current	I _{op}		24.5	26	A
Operation voltage	V _{op}		1.7	1.8	V
Spectral width FWHM	Δλ		3	3.5	nm
Wavelength shift vs. temp.	Δλ/ΔT		0.35		Nm/°C
Vertical far field divergence angle	θ _⊥		31	33	Deg
Horizontal far field divergence angle	θ _{//}		9	9.5	Deg
Polarization	TE	95			%

Remark: Tested with COS packaged products in the CW mode at 25 °C.

Current-Power-Voltage-Efficiency

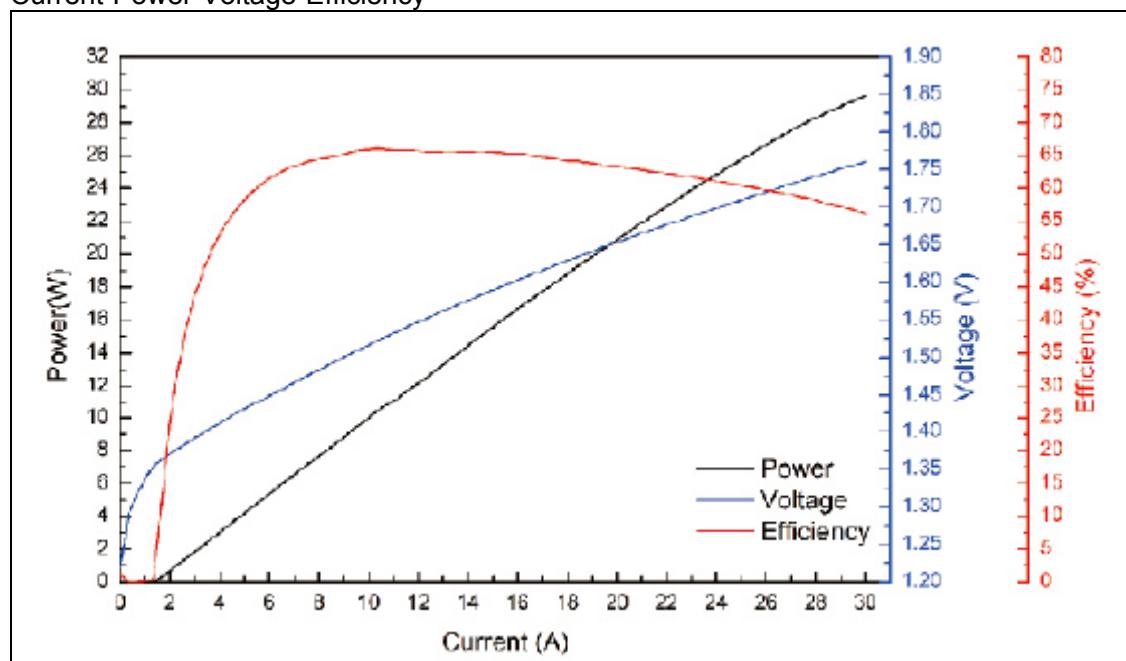

Spectral Characteristics

